

StellarMark I-Series Specifications

Model		I-Series				
Model No.		IFIIS 20JFL	IFI 20SHS	IFIIS 30JFL	IFIIS 50JFL	IFIIS 60JFL
Laser Type	Wavelength	1064 nm				
	Type	Yb-doped, MOPA				
	Output Power	20W		30W	50W	60W
	Beam Mode	TEM00				
	Beam Quality (M ²)	<1.5	<1.3	<1.5	<1.5	<1.8
	Frequency	1-600 kHz	1-1000 kHz	1-600 kHz	1-600 kHz	1-400 kHz
	Waveform	Single	25	Single	Single	Single
Cooling		Air-cooled				
Max. Linear Marking Speed		3,000 mm/s				
Max. Marking Speed		10,000 mm/s				
Electrical Requirement	Power Supply	100~240V, 50/60 Hz Max 15 Amp				
	Power Consumption	Max. 1650W				
Dimensions	Laser head	L 497 x W 168 x H 152 mm				
	Control unit	L 470 x W 360 x H 241 mm				
Laser Head Weight		9 Kg				
Control Unit Weight		25 Kg				
Operating System		Microsoft Windows 2000 / XP / Vista(32/64 Bit) / 7(32/64 Bit) / 8(32/64 Bit) (Desktop or Laptop PCs)				
Environment	Temperature	15° C ~ 35° C				
	Humidity	10 ~ 80%, Non condensing				
Safety		Class 4 (EN60825-1 Class 1 available with safety shield and LFC) 2006/42/EC Machinery Directive 2014/35/EU Low Voltage Directive 2014/30/EU Electromagnetic Compatibility Directive				


Scan Lens Specifications

Specifications	StellarMark IFIIS 20/30/60JFL Scan Lens			
Model No.	70	110	180	300
Working Area	70 x 70 mm	110 x 110 mm	180 x 180 mm	300 x 300 mm
Spot Size*	27 µm	44 µm	71 µm	114 µm
Working Distance	142.0±1 mm	220.0±2 mm	350.3±2 mm	553.3±3 mm
Repeatability**	0.03 mm	0.03 mm	0.04 mm	0.06 mm

Specifications	StellarMark IFII 20SHS Scan Lens		
Model No.	70	110	180
Working Area	70 x 70 mm	110 x 110 mm	180 x 180 mm
Spot Size*	22 µm	35 µm	55 µm
Working Distance	142.0±1 mm	220.0±2 mm	350.3±2 mm
Repeatability**	0.03 mm	0.03 mm	0.04 mm

Above specifications are subject to change without further notices. See dealer or visit <http://www.GCCworld.com> for more details.
All above spot size will be material dependent.
*According to theoretical calculation
**The test is 8-hour continuous firing with power level at 30% using a 60JFL
△ Specifications are subject to change without prior notice


Optional Items



Mounting Platform



LFC Workstation



Adjustable Z-axis Table



Rotary Attachment



EZ Stand

Authorized Dealer



www.GCCworld.com



The Ultimate Marking Solution for Industrial Manufacturing

StellarMark *i* series



- Field proven U.S. scan head and UK fiber laser components
- Achieve 0.1mm character height with perfect TEM00 beam mode
- Multiple waveform are available for sophisticated marking and micro-machining applications
- G-Mark Library (optional) software features customized programming, mark on fly and tiling marking
- Ideal solution for ABS, PC, PET, wafer, rubber and metal marking



GCC Headquarters	4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan	886-2-6616-6692	Fax : 886-2-2694-6875
GCC China	No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China	86-512-5726-1515	Fax : 86-512-5726-1518
GCC Europe B.V.	Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands	31-10-458-9367	
GCC America, Inc	20453 E Valley Blvd. Walnut, CA 91789, USA	1-909-718-0248	Fax : 1-909-718-0251
		US & Canada Only	Toll Free: 1-888-284-5211

Laser Marking System

StellarMark I-Series

Design in top-notch U.S. scan head and U.K. fiber laser source, StellarMark I series provides industrial users superior and reliable output quality under long-term operation. From automotive parts and tools to electronic switch and wafer, StellarMark I series provides comprehensive solution for diverse requirements.

Superior Output Performance >>>>>

Benefiting from the state-of-the-art design, StellarMark I-Series stands out from the competition by increasing productivity and providing superior output quality. The TEM00 beam mode brings in high precision marking results and stable laser output maintain consistent marking quality. Different M2 values are available with the different models under the IF-series catering to the different requirements for different applications.



► IFIIS 20JFL / 30JFL / 60JFL

Application



Depth Marking



Color Marking




Glass Marking



Keypad Marking



Wafer Marking



IC Marking

● Key Switch

This safety feature enables operators to keep the laser locked to avoid unauthorized use.




● Emergency Stop

The machine can be entirely shut down by pressing the "Emergency Stop" button from controller when any emergency occurs.



Consistent Power Stability

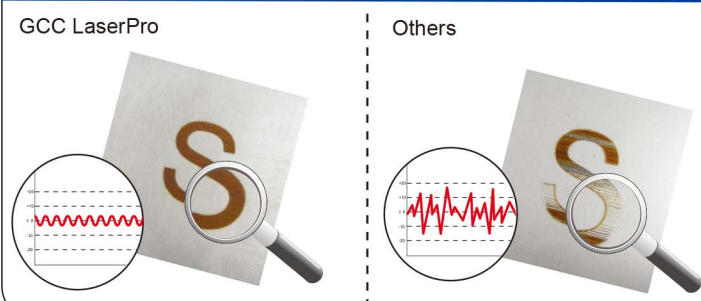


● Waveform

Multiple waveforms are available for the IFII series further enabling you to make use of 2 (RMZ) or 25 (SHS/HHS) optimized pulse waveforms ranging in duration from 10-240ns optimized for sophisticated marking and micro-machining applications. The availability of the waveforms open up more combinations that enables users to fine-tune their laser settings for optimal results.



● Superior Text Function

- Automatic Serial Marking
- Barcode Marking
- Wobble Marking
- Jump Cross Marking
- Font Variation
- Logo and Image Marking
- Arc Marking



▲ Jump Cross Marking



▲ Wobble Marking



▲ Arc Marking



▲ Barcode Marking


● Pyramid Focus Tool

The innovative and patented pyramid focus tool is an accessory unit for providing the best working distance on StellarMark IFIIS series.




● Preview Mode

Variable speed, red dot pointer "preview" mode allows for accurate and easy marking positioning on the marked part.



▲ Full Path



▲ Outline

● G-Mark Library (Optional)

This programmable software can be used to customize functions by using VB scripts. All commands are received real time from a master PC and position offsets, rotating angle, and sequential marking can be set up. With G-Mark Library, the workflow of marking process can be optimized and simplified at the production line.

